




International Journal of
Mechanical Engineering Research and Technology

ISSN 2454-535X

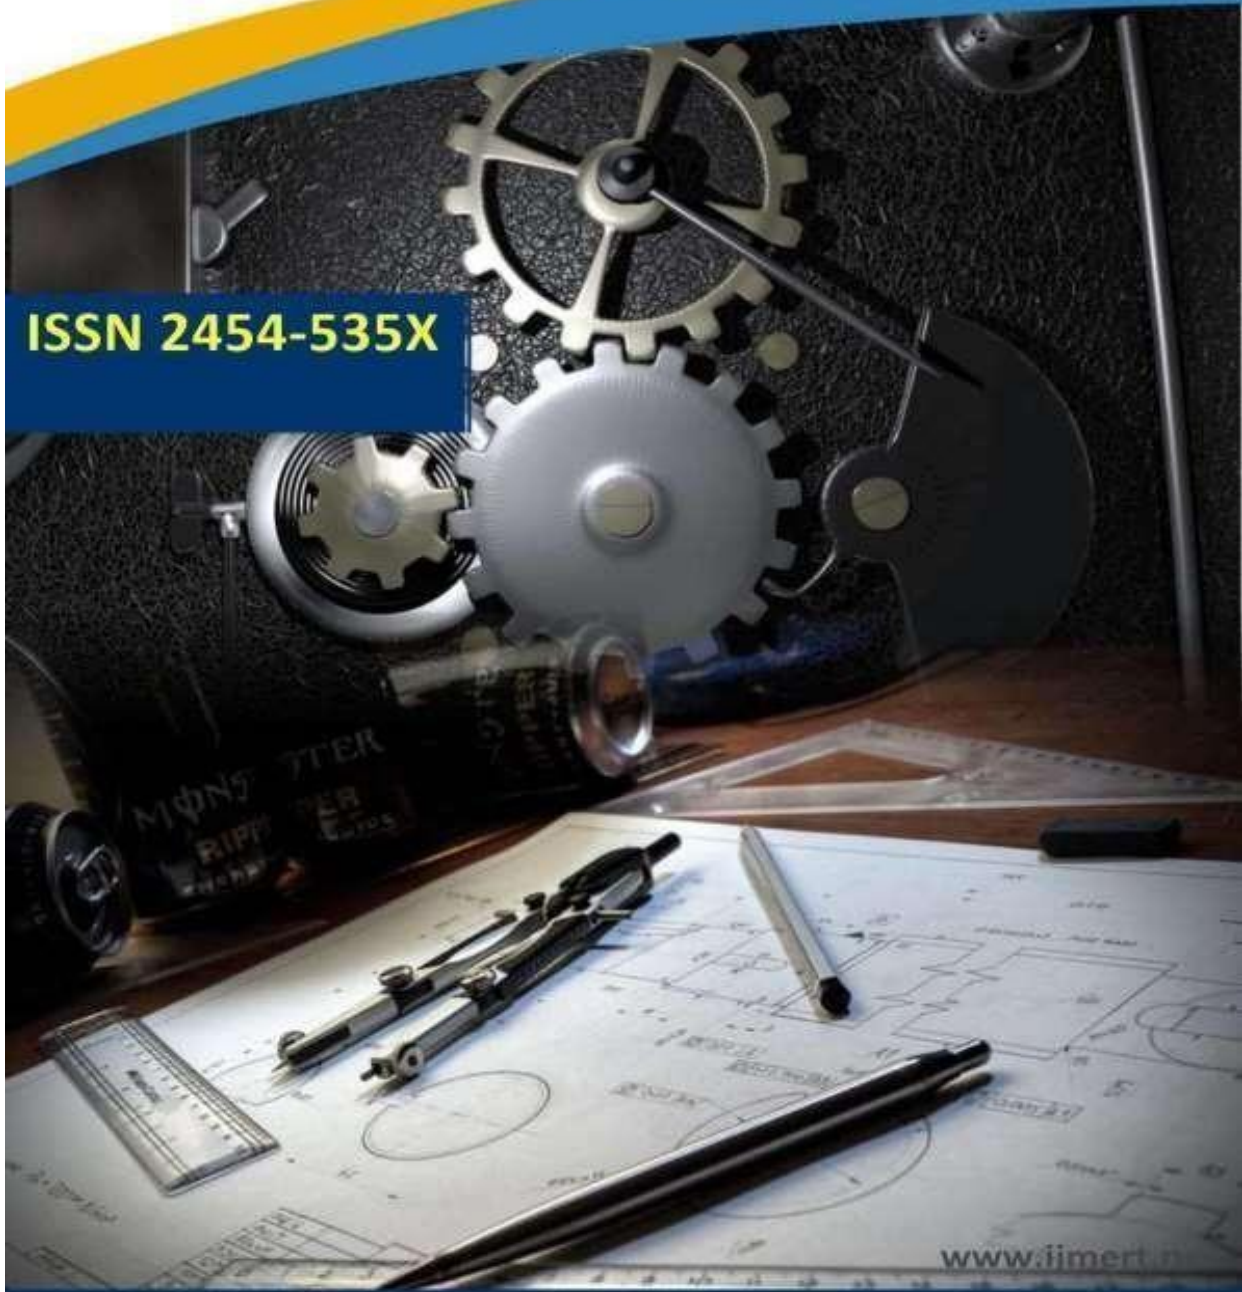

www.ijmert.net

Email ID: info.ijmert@gmail.com or editor@ijmert.net

CENTRALIZED HYBRID POWER GENERATION BY A REGENERATIVE METHOD FOR A MICROGRID

K.Hanumaji¹, S.P.Vijayaragavan²

Research Scholar¹, Associate Professor²

Bharath Institute of Higher Education and Research^{1, 2}

Abstract: *A renewable energy resource inter combined with electric vehicle has been more popular due to its attractive specifications along with in it (i.e.) energy flow between storage device to load and after that power flow between load to storage devices. The surplus power generation from solar panel incorporated with battery and supercapacitor gained more attention with continuous power flow under standstill condition. Ahead continuous conduction, the enriched one cycle control works under discontinuous mode and shortens the integrator reset time in comparison with discharging time of an inductor.*

Keywords: *Switched Reluctance Motor (SRM), supercapacitor, Non Isolated dc-dc converter, Asymmetric Half Bridge Converter.*

I.INTRODUCTION

The transportation is the enlarged growing aspects among all. As long ago the fuels such as petrol, diesel, coal are became more popular. Also they pollute environment severe. Few years back lot of people followed past. At that time Plug-in charging electric vehicle is the only solution to dispense environmental pollutant and maintains a eco-friendly nation. Most of the electric vehicle use battery and supercapacitor as source. They are not enough to fulfill the requirement. Because they need charging station everywhere to charge it. To compensate this problem and consider the time taken to charging, manufacturing unit prescribe renewable resource. Renewable resources are solar, wind, hydro, biomass, geo-thermal, tidal, etc. the main renewable resources are sun, hydro, biomass, wind, etc. Among with this the hydro and biomass

are need a huge locality for installation and it need a separate space for energy storage system. But solar and wind blades are available in compact size; also it is easy to fix in vehicle. Among all solar power production is chosen due to its size and efficiency. It produce maximum power during day-time and given it to the battery. During vehicle running condition it charges the source. So there is no need to charge the battery externally.

The photovoltaic system with maximum power point tracking is the initial case to fulfill the load. It is essential to overcome with control techniques available in recent work. The maximum power point tracker (MPPT) trace the maximum power production from pv panel and fed to the conversion system. All of the PV system enrols boost conversion to overcome the total requirement.

Advancement in hybrid electric vehicle includes satisfies itself by power production and supplies externally as charging station. There are several conditions in this type of production and distribution. In this proposed system there is no regularities available. If the power production from renewable resource must energise battery and supercapacitor. The regenerative power flow from motor also fed to the storage element. After the completion of charging the generative power is supplied to external means by primary and secondary winding. The principle of electromagnetic interference is evolved with in this power transmission.

To establish charging and discharging in a medium we require a specified converter to perform whole

action uniformly. Thus, a non isolated bidirectional power flow dc-dc converter is preferred. The bidirectional switches are controlled by a controller named one cycle control. In this paper one cycle controller based non isolated dc-dc converter is studied with energy storage devices. Literally a control switch can control the wireless power transfer. It allows the system share the power whenever the production is to be high.

In section 2 the proposed methodology and its modes of operation is explained. The section 3 prescribes about one cycle control mechanism. The working of non isolated bidirectional dc-dc converter is reviewed in section 4. In section 5 the simulation results are discussed. The entire system is concluded in section 6.

II. METHODOLOGY

The variable energy resources are PV panel, battery and supercapacitor. These variable energy resources are well suited for different operating modes and notably adapt with the inconvenience in weather changes. The converter's are responsible for the load. During day time the solar panel generate power and supplies the load. Excess power from the panel is stored in battery and supercapacitor via non isolated bidirectional dc-dc converter. During fair weather conditions the both battery and supercapacitor satisfies the load requirement. During regenerative braking the amount of power generated is said to charge the storage devices. Apart the need the excess available power is transferred to the others as wireless charging station. The various modes of operations are listed below:

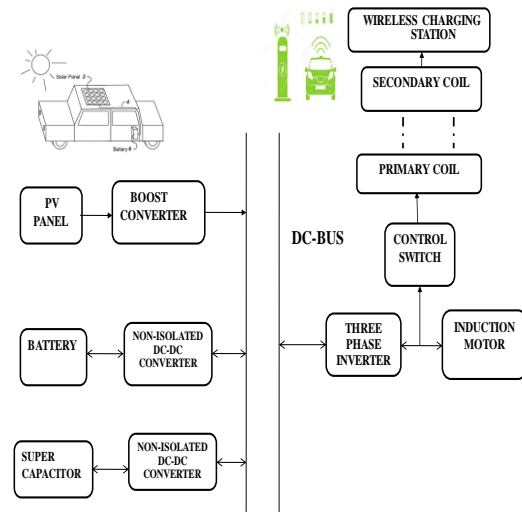


Fig.1. proposed topology with vehicular functioning

Vehicle Normal Energy Flow: All of the electrical components need certain amount of electrical energy to power on and function in initial condition. In this mode battery supplies certain amount of power to the entire network.

Vehicle Acceleration Energy Flow: During acceleration condition the motor need more power. Both battery and supercapacitor supply huge power to the motor to rotate at maximum speed.

Regenerative Braking Mode: During retardation of motor, the motor rotates in a reverse direction to act as generator. It generates some voltage and it is driven to the energy storage elements to energies.

Vehicle Charging Mode: At rest condition the roof top solar panel receives abundant light energy and convert it into electrical energy. After regenerative braking mode, battery and supercapacitor needs additional energy to fulfill its capacity. This mode satisfies the need.

Vehicle Discharging To Charging Stations : The excess power generated by the solar panel is utilized in this section. A wireless power charging can make electric power transfer in a successive way and it supplies the neighboring charging stations.

III. NON ISOLATED DC-DC CONVERTER

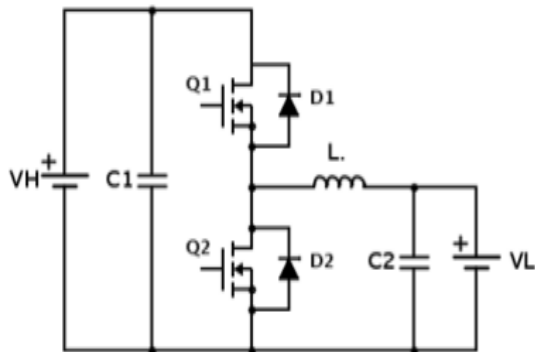


Fig.2. visualizes non isolated bidirectional dc-dc converter

The non isolated bidirectional dc-dc converter is a combination of both buck and boost converter with some similar changes within it (i.e.) bidirectional power flow control. It is comprised of two capacitors, one inductor, two switches. Normally cascaded buck-boost converters suffer from switching stress, capacitor undergoes thermal and electrical stress. This decreases the efficiency and the lifetime of semiconductor devices. To overcome this problem we move upon with non isolated bidirectional dc-dc converter. The reduced switching stress and heat loss improves the efficiency.

During boost operation the diode D2 and switch Q1 conducts; others in rest condition. In this mode, converter boost the voltage during discharging. Similar to boost operation, the buck operation is performed. In this Q1, D2 are turned on; Q2, D1 turned off. The converter buck the input voltage and stores within storage elements.

IV. ONE CYCLE CONTROL

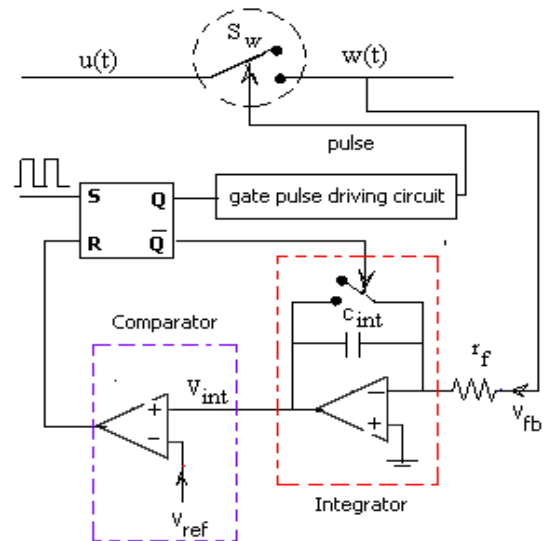


Fig.3. one cycle control

The operation of switches is controlled with one cycle control. The variation between control reference and switching variable is continuously integrated and is continuously monitored to attain zero average error in one switching cycle. It is similar to that of continuous time integral control. It avoids disturbance in load sinusoidally with the error correction. An adequate duty ratio can be attained by measure and compare the control reference. Further it incorporates with regulation or distortion in load. The deterioration in input and output is compensated with this control topology. Hence this method is well suited for variable conditions.

V. RESULT AND DISCUSSION

The above simulation explains about induction motor based hybrid electric vehicle associated with non isolated bidirectional dc-dc power flow converter. The performance and operation are evaluated within this section.

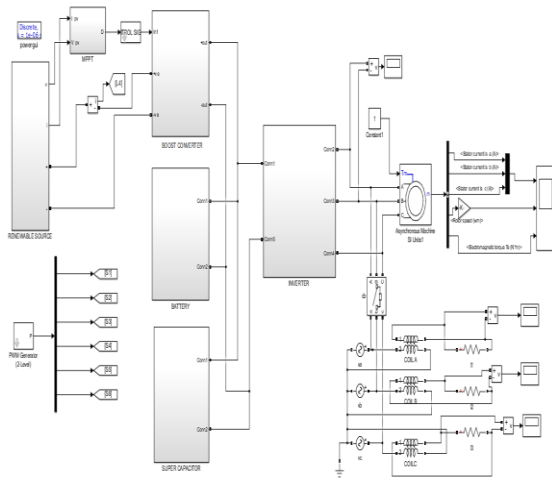


Fig.4.simulink blocks showing hybrid electric vehicle

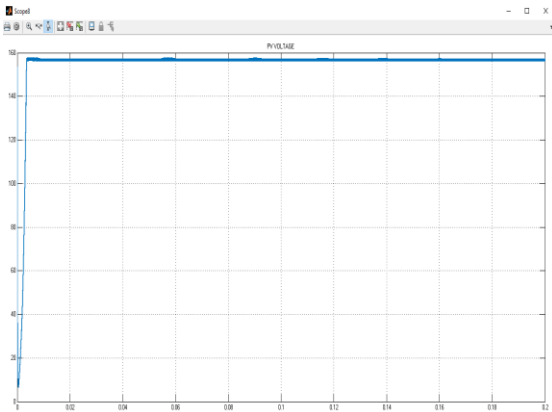


Fig.5.output voltage from PV source

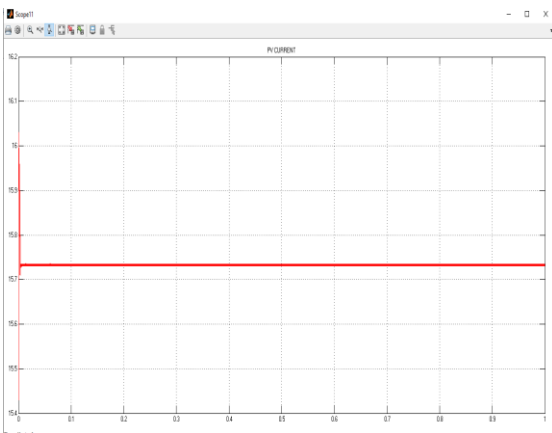


Fig.6.depicts pv current

At constant temperature the total amount of power generation is said to be nearly 155V, 15.5 A and is depicted in the below waveform. Also the power generation varies with variation in climate. This output voltage is directly fed to the dc bus. Depends upon the requirement this voltage may deliver to load or to storage devices.

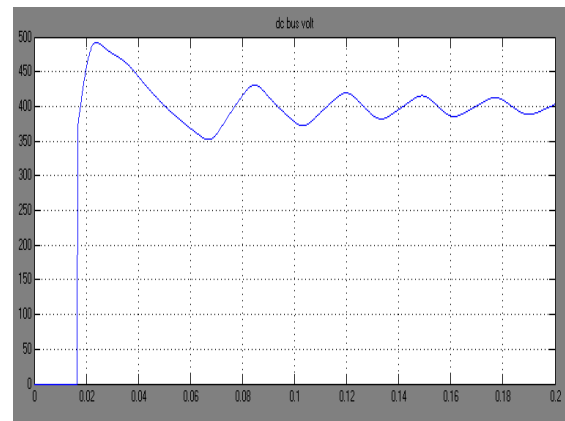


Fig.7.showing voltage maintained at dc bus

The total amount of power from various sources integrated with boost converter and non isolated bidirectional dc-dc converter is fed to the dc busbar. The bus acts as a major terminal to the input and output. A total of 400V continuously maintained in this bus.

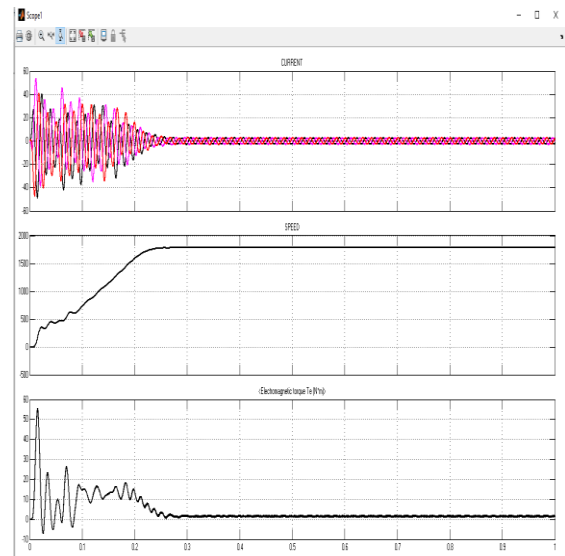


Fig.8.depicts a combination of current, speed, torque corresponds to time



Fig.8 hardware image



Fig.9 gate pulse

The induction motor torque, speed, current are depicted in below waveform. During starting condition the motor needs huge amount of input voltage to accelerate. The oscillation in torque shows how much amount of torque acts upon motor during starting condition. Literally the torque becomes constant at running condition. The motor attains synchronism under constant torque.

VI.CONCLUSION

The simulation study briefly explains about the efficiency of the motor under normal energy flow, acceleration energy flow, regenerative braking

mode, charging mode, discharging to charging stations. This method could replenish the energy requirement for electric vehicles at present and future. The wireless power transmission also evolved further advantages in this topology. The one cycle control avoids zero average error and then prevent the voltage disturbance in source and load. This converter avoids switching stress, thermal and conduction loss in comparison with cascaded buck-boost converter. This trend may enlarge in future with lossless power transmission.

REFERENCE

1. “Overview of wireless charging and vehicle-to-grid integration of electric vehicles using renewable energy for sustainable transportation” Peter K. Joseph ; Elangovan Devaraj ; Arunkumar Gopal; IET Power Electronics (Volume: 12 , Issue: 4 , 4 10 2019)
2. “Distributed Control for State-of-Energy Balancing of Supercapacitor Modules in Light Rail Vehicles” ChengzhangLyu ; Zhiwu Huang ; Heng Li ; Hongtao Liao ; Yingze Yang ; Jun Peng ; Jing Wang; IEEE Transactions on Vehicular Technology (Volume: 68 , Issue: 5 , May 2019)
3. “Achieving Low Carbon Emission for Dynamically Charging Electric Vehicles Through Renewable Energy Integration” XiaolinMou ; Yingji Zhang ; Jing Jiang ; Hongjian Sun; IEEE Access (Volume: 7); 22 August 2019
4. “A Dynamic Stochastic Optimization for Recharging Plug-In Electric Vehicles” Siyan Liu ; Amir H. Etemadi; IEEE Transactions on Smart Grid (Volume: 9 , Issue: 5 , Sept. 2018)
5. “Menu-Based Pricing for Charging of Electric Vehicles With Vehicle-to-Grid

- Service” Arnob Ghosh ; Vaneet Aggarwal ; IEEE Transactions on Vehicular Technology (Volume: 67 , Issue: 11 , Nov. 2018)
6. “Modeling and State-of-Charge Estimation of Supercapacitor Considering Leakage Effect” Pankaj Saha ; Satadru Dey ; Munmun Khanra ; IEEE Transactions on Industrial Electronics (Volume: 67 , Issue: 1 , Jan. 2020)
 7. “Non-isolated interleaved bidirectional DC–DC converter with high step voltage ratio and minimum number of switches” Mahdi Shaneh ; Mehdi Niroomand ; Ehsan Adib ; IET Power Electronics (Volume: 12 , Issue: 6 , 5 29 2019)
 8. “A Non-Isolated Hybrid-Modular DC-DC Converter for DC Grids: Small-Signal Modeling and Control” Ahmed Elserougi ; Ibrahim Abdelsalam ; Ahmed Massoud ; Shehab Ahmed ; Published in: IEEE Access (Volume: 7) ; 13 September 2019
 9. “Energy Management of Hybrid Electric Vehicle Using Vehicle Lateral Dynamic in Velocity Prediction” Lin Li ; Serdar Coskun ; Fengqi Zhang ; Reza Langari ; Junqiang Xi ; IEEE Transactions on Vehicular Technology (Volume: 68 , Issue: 4 , April 2019)
 10. “Analyzing the Need for a Balancing System in Supercapacitor Energy Storage Systems” Federico Martin Ibanez ; IEEE Transactions on Power Electronics (Volume: 33 , Issue: 3 , March 2018)
 11. “Self-balanced non-isolated hybrid modular DC–DC converter for medium-voltage DC grids” Ahmed A. Elserougi ; Ahmed M. Massoud ; Ibrahim Abdelsalam ; Shehab Ahmed ; IET Generation, Transmission & Distribution (Volume: 12 , Issue: 15 , 8 28 2018)
 12. “Non-Isolated Single-Inductor DC/DC Converter With Fully Reconfigurable Structure for Renewable Energy Applications” Tian Cheng ; Dylan Dah-Chuan Lu ; Ling Qin ; IEEE Transactions on Circuits and Systems II: Express Briefs (Volume: 65 , Issue: 3 , March 2018)
 13. “Family of universal bidirectional DC–DC converters with an extended voltage gain” Boris Axelrod ; Yefim Berkovich ; Yuval Beck ; IET Power Electronics (Volume: 12 , Issue: 13 , 11 6 2019)
 14. “A Bayesian Real-Time Electric Vehicle Charging Strategy for Mitigating Renewable Energy Fluctuations” Milad Latifi ; Azam Khalili ; Amir Rastegarnia ; Saeid Sanei ; IEEE Transactions on Industrial Informatics (Volume: 15 , Issue: 5 , May 2019)
 15. “One-Cycle Control for Electrolytic Capacitor-Less Second Harmonic Current Compensator” Li Zhang ; Xinbo Ruan ; Xiaoyong Ren ; IEEE Transactions on Power Electronics (Volume: 33 , Issue: 2 , Feb. 2018)
 16. V Mahalakshmi, S P Vijayaragavan, T Jayanthi ; Design and Simulation of a Fuzzy Logic

Controlled Hybrid Wind-Solar System, International Journal of Recent Technology and Engineering (IJRTE)ISSN: 2277-3878, Volume-7, Issue-6, March 2019

17. Anitha Sampthkumar S. Prakash S. P. Vijayaragavan ;Development of an Efficient On-Board Charger for Series Plug in Hybrid Electric Vehicles. Advancement in Engineering, Science & Technology J. Mech. Cont.& Math. Sci., Special Issue, No.-2, August (2019) pp 503-510
18. Jayalakshmi, V.; Ali, Jafar; Vijayaragavan, S.P.; , Implementation of Optimal Power Flow in Microgrids with Energy Storage, International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering, v-4, i-2, pp-1073-1079, 2015.